


## Features

- Conversion of 1300-1600nm laser light into electric power
- Up to 3V-20mA output
- Single mode fiber pigtailed
- Complete electrical isolation

## Applications

- Remote powered equipments
- Electro-magnetic sensitive antenna

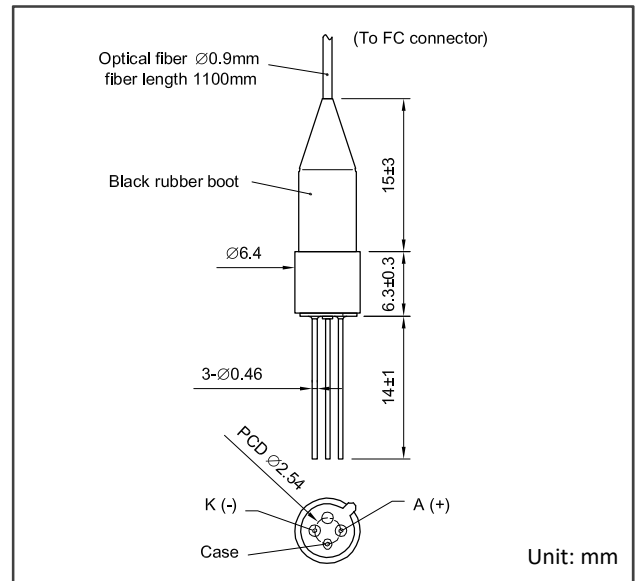

## Absolute Maximum Ratings

Parameter	Symbol	Value	Unit	Note
Maximum optical input power	$P_i(\max)$	200	mW	
Output current	$I_{OUT}$	$\pm 30$	mA	
Operating temperature	$T_{opr}$	-40 to +70	°C	Avoid dew condensation
Storage temperature	$T_{stg}$	-40 to +85	°C	Avoid dew condensation


## Electrical and Optical Characteristics (Ta=25°C unless otherwise noted)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Maximum output power	$P_{max}$	30	34	-	mW	$\lambda=1480\text{nm}$ $P_{in}=100\text{mW}$
Open circuit voltage	$V_{OC}$	-	4	-	V	
Short circuit current	$I_{SC}$	-	12	-	mA	
Conversion efficiency	$\eta$	30	34	-	%	
Operating wavelength	$\lambda_{op}$	1300	-	1600	nm	


## Pigtail specifications

Parameter	Specification	Unit	Note
Optical fiber type	Single mode fiber	-	$\phi 0.9\text{mm}$
Optical fiber length	$1100 \pm 100$	mm	
Optical connector	FC	-	AdPC polished


Current, Output Power - Voltage

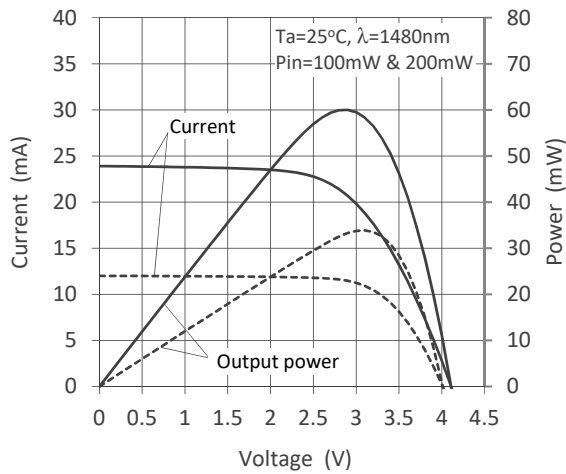


Pmax - Optical Input Power

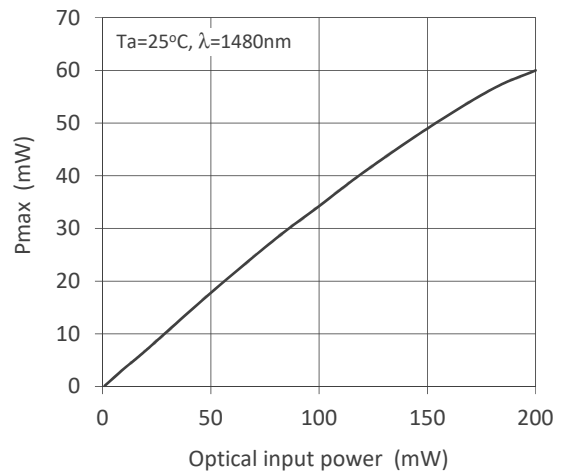


Imax - Optical Input Power

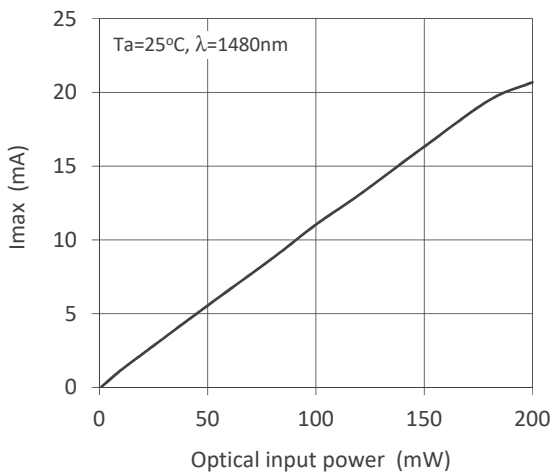

Vmax - Optical Input Power

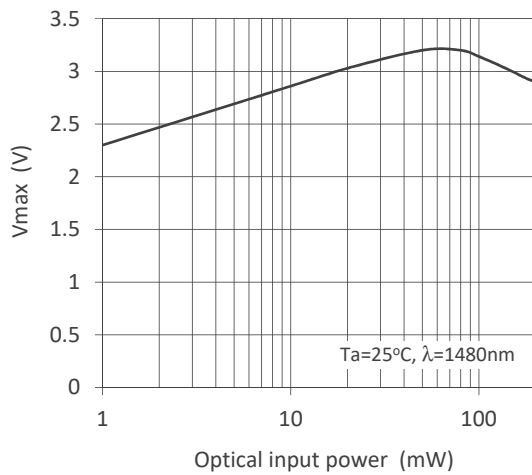

Definition of Pmax, Imax and Vmax

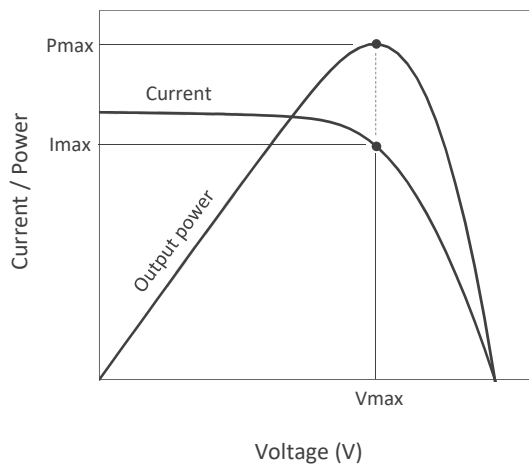

- Specifications , characteristics, data, materials, structures specified in this datasheet are subject to change without notice. Please refer to the latest specification before use of the products.
- Products listed in this datasheet comply with the RoHS Directive (2011/65/EU).



**Opto-technologies for the Future**

---

## **KYOTO SEMICONDUCTOR Co.,Ltd.**

<b>Headquarters :</b> 307-21 Nishiote-cho Fushimi-ku Kyoto 612-8362 Japan	TEL: +81-75-605-7311
<b>Tokyo Sales Office:</b> 24 <sup>th</sup> Sky Bldg.2F, 1-34-3 Shinjuku Shinjuku-ku, Tokyo 160-0022 Japan	TEL: +81-3-5312-5360
<b>Kansai Sales Office:</b> 307-21 Nishiote-cho Fushimi-ku Kyoto 612-8362 Japan	TEL: +81-75-605-7314
<b>Kyosemi Opto America Corp:</b> 4655 Old Ironsides Suite 230 Santa Clara, California 95054 USA	TEL: +1-408-492-9361
<b>Eniwa Operation:</b> 385-31 Toiso Eniwa-shi, Hokkaido 061-1405 Japan	TEL: +81-123-34-3111
<b>Kamisunagawa Operation:</b> 70-1 Kamisunagawa Kamisunagawa-cho Sorachi-gun, Hokkaido 073-0200 Japan	TEL: +81-125-62-3611